


Programming Your Bell BlackBerry 8830 World Edition

1. Dial ## and your 6 digit lock code. Then press the green phone button.
2. The CDMA Service Edit Screen will appear on your screen.
3. Erase the 10 digit number in the Mobile Directory Number field. Once erased enter your 10-digit phone number into the field.

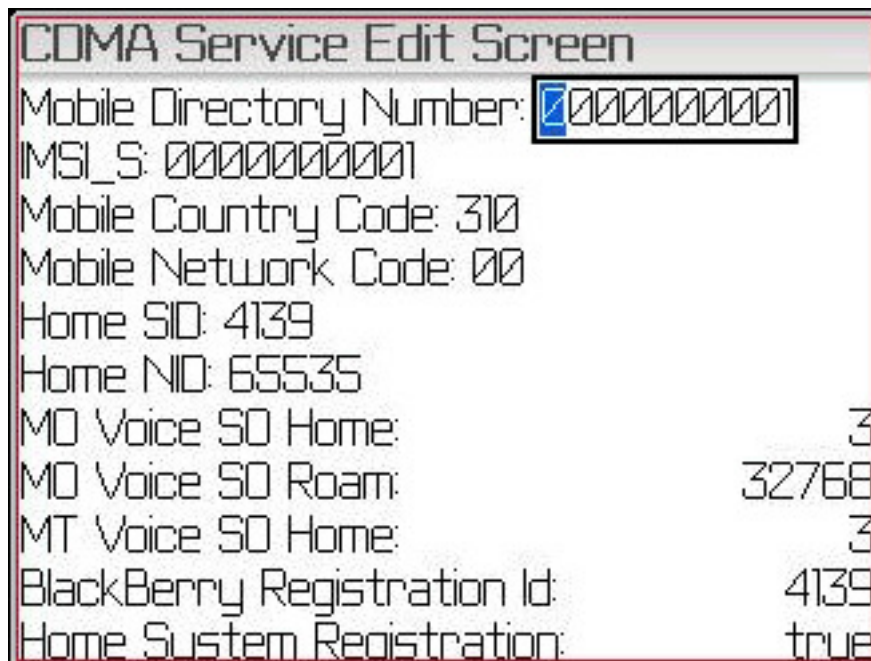

CDMA Service Edit Screen

Mobile Directory Number: 0000000001

IMSI_S: 0000000001

Mobile Country Code: 310

Mobile Network Code: 00

Home SID: 4139

Home NID: 65535

MO Voice SO Home: 3


MO Voice SO Roam: 32768

MT Voice SO Home: 3

BlackBerry Registration Id: 4139

Home System Registration: true

4. Repeat the process you've just completed with the completed with the IMSI_S field. (Erase the existing number and replace it with your 10 digit phone number)

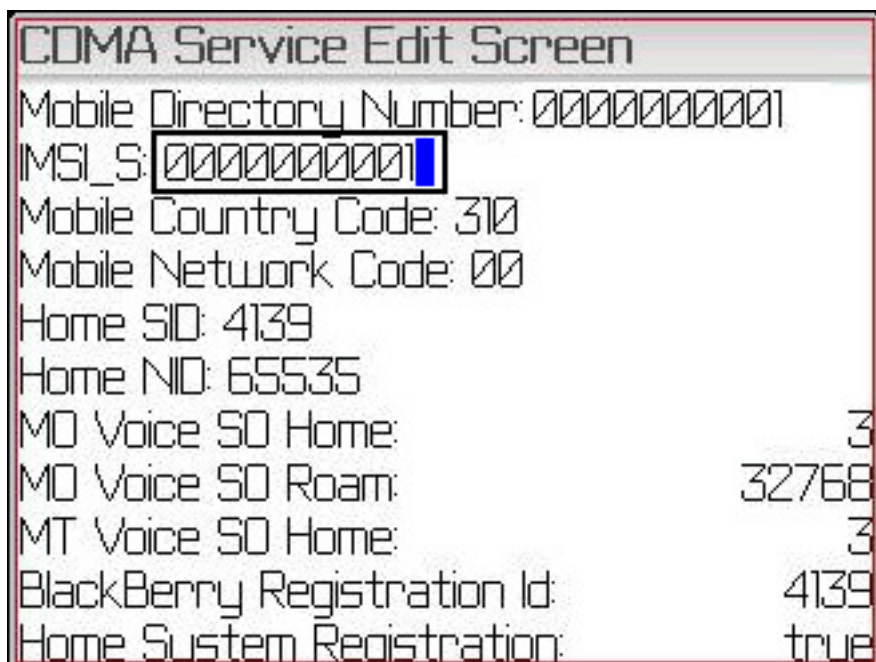

CDMA Service Edit Screen

Mobile Directory Number: 0000000001

IMSI_S: 0000000001

Mobile Country Code: 310

Mobile Network Code: 00

Home SID: 4139

Home NID: 65535

MO Voice SO Home: 3

MO Voice SO Roam: 32768

MT Voice SO Home: 3

BlackBerry Registration Id: 4139

Home System Registration: true

5. Press the Menu key on your BlackBerry



6. Use the trackwheel and select the Save option (by pressing the trackwheel in)
7. Your BlackBerry will display "Write Successful. Resetting device." The BlackBerry will power off and then back on.



8. To test that the programming was successful, make a test call.